

ZDAPMB1





Mercedes Vito

- 2021
- W447 (Facelift) Audio 30



Stereo Removal 1

Use a plastic pry tool on the outer edges of the plastic panel to loosen the clips all around. (The whole panel comes of in one piece)




Stereo Removal 2

Tools required: Torx T25 bit


Loosen the four screws marked with red circles. Then the stereo is loose and ready to be taken out. Remove all connectors on the back of the stereo.



Remove the black and white connectors on the back of the quadlock connector.

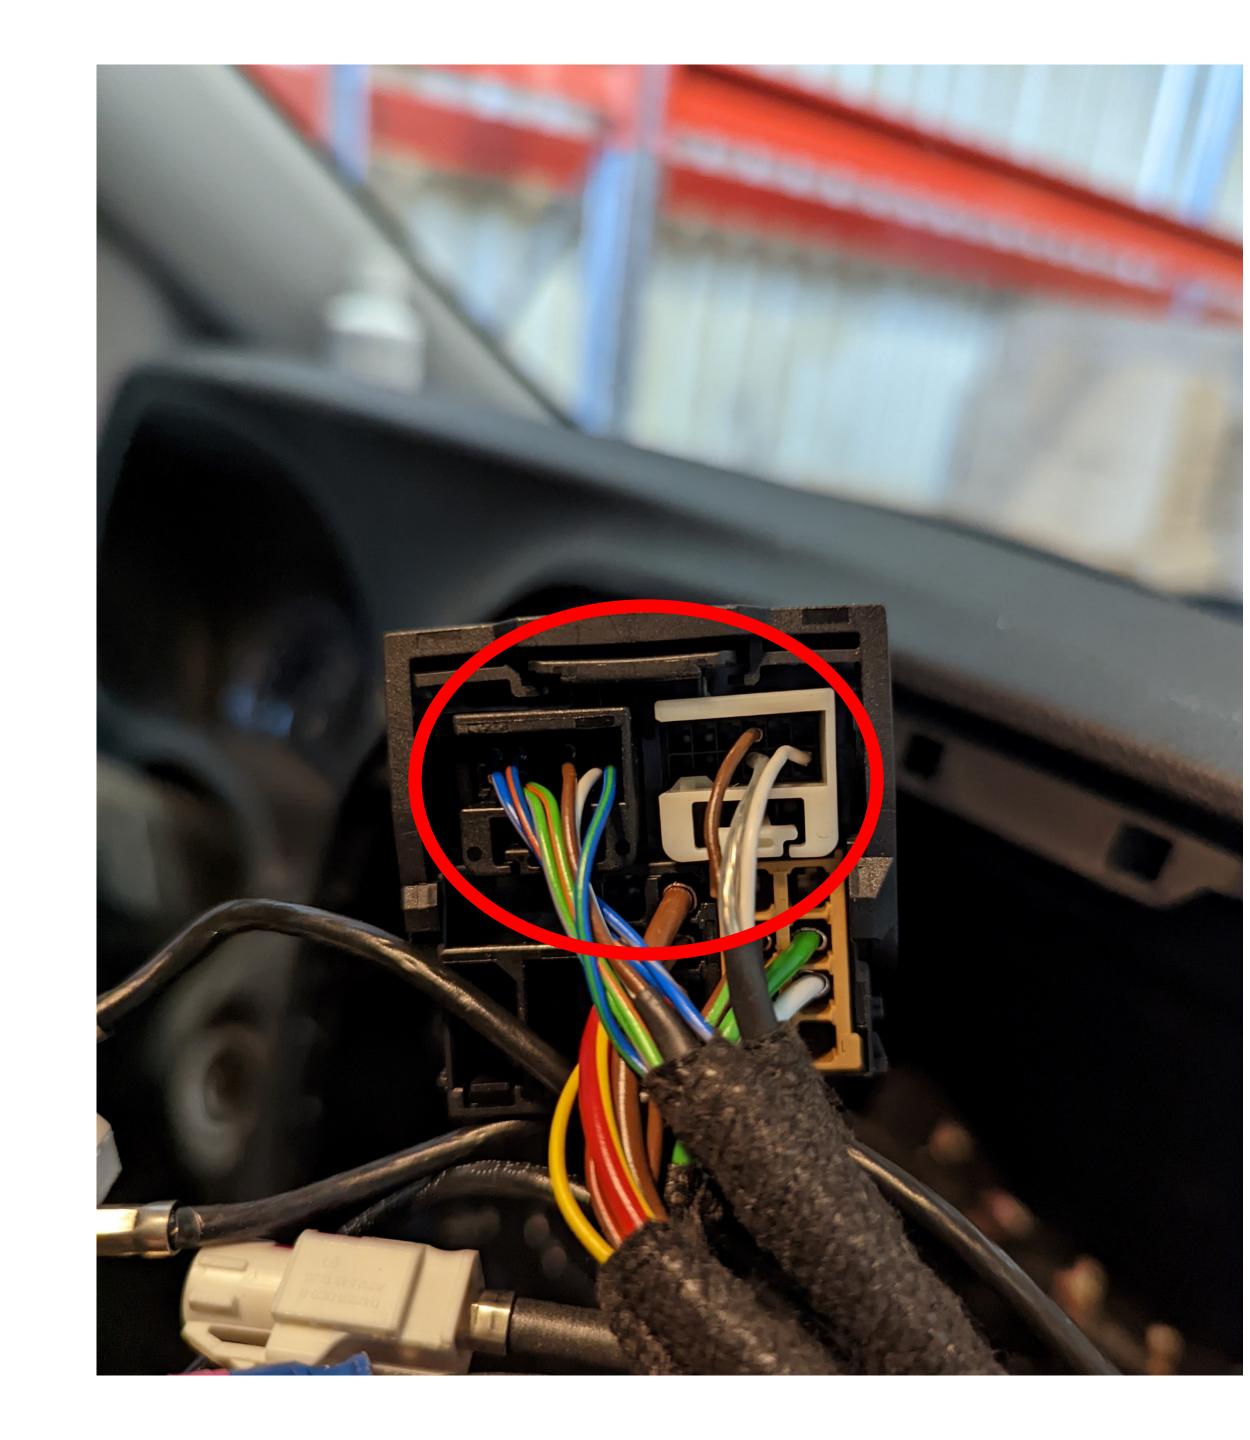


Connect the black and white connectors to the CT10MC02 quadlock connector.

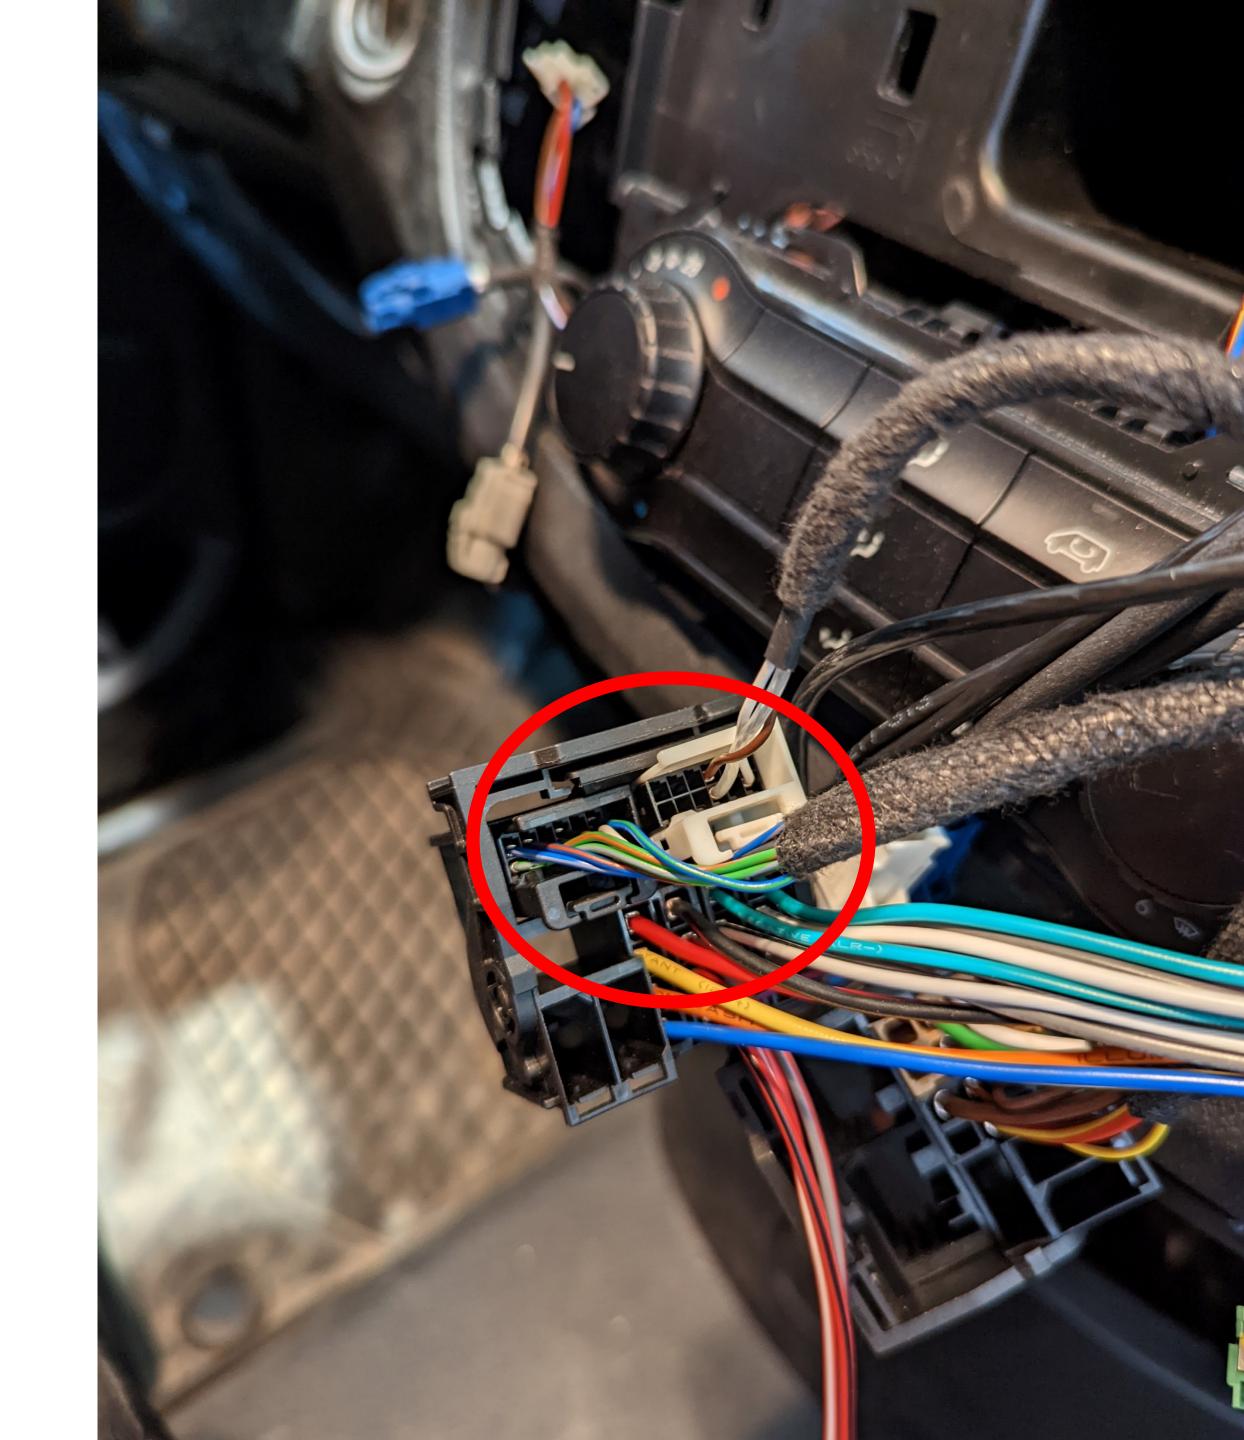

Tools required:Plastic pry tool

Use a plastic pry tool to remove the center panel for easier cable laying.

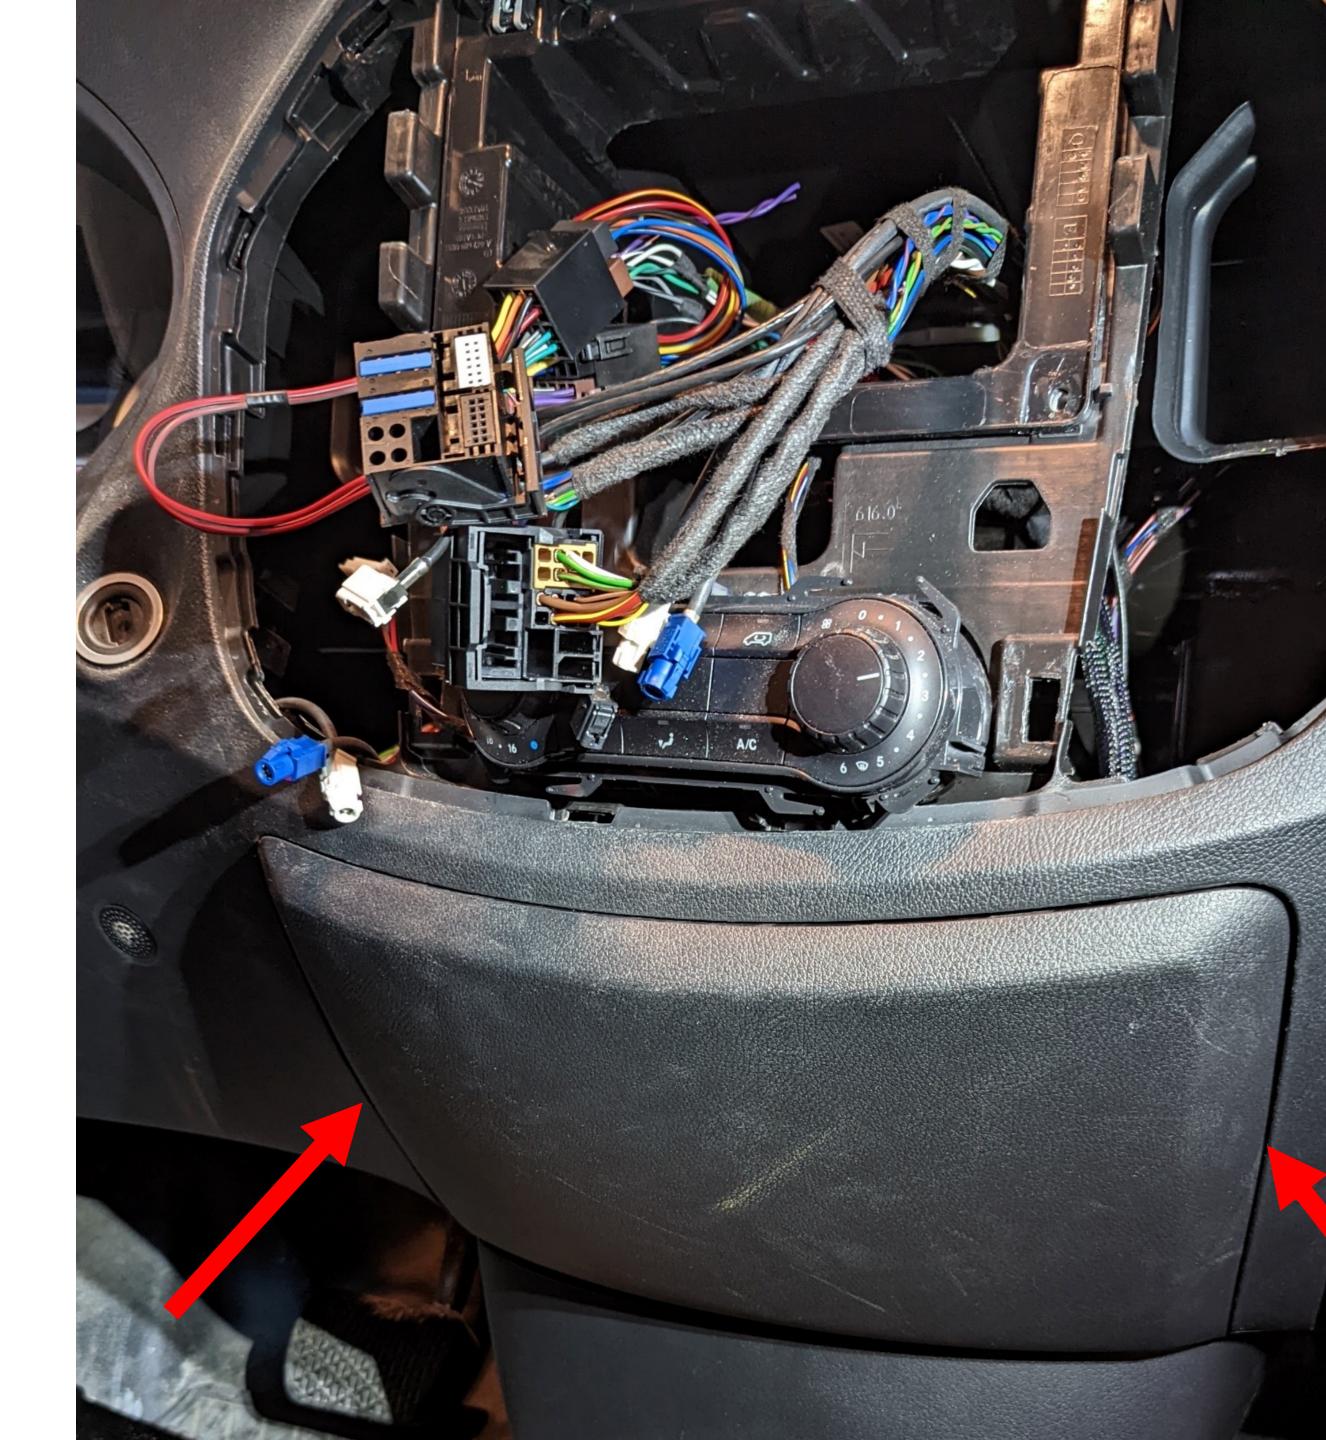

Tools required: Torx T25 Bit

- 1. Remove the lower center panel. On each side there is a plastic lid, remove both of them and loosen the T25 screw hidden behind.
- 2. Pull the panel towards you from the center to loosen the panel.



 Loosen the 12V outlet connector by pulling it upwards.



• Remove the side panel by pulling in the direction of the arrows.



• Remove the plastic trim panel for the battery.




• Pull the side panel uppwards to remove it.




 Connect the ZDAISOT cable to the CT10MC02 and pull the cable down to the floor.

• OBS! Use the external 10ohm resistor cable on the speaker side.

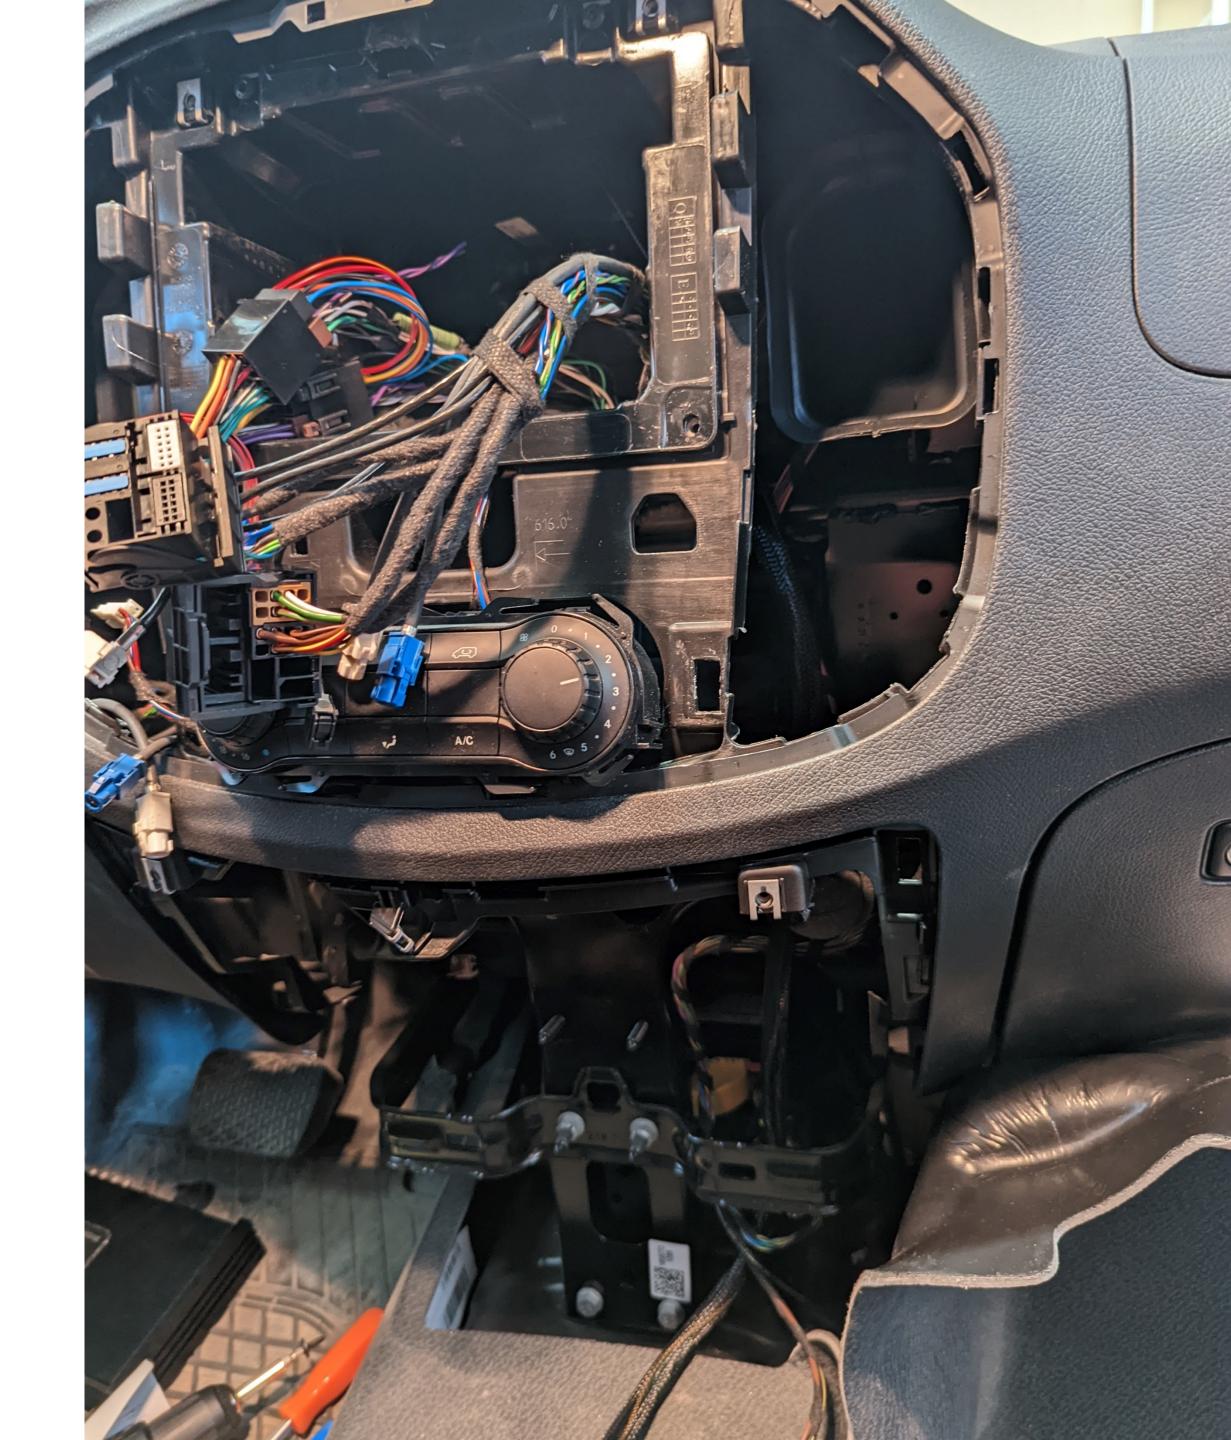

- 1. Pull the carpet up so that you can pull the cable in the center under the carpet.
- 2. Remove the passanger seat by pulling it straight up.

OBS! In some cases this may require extreme force.

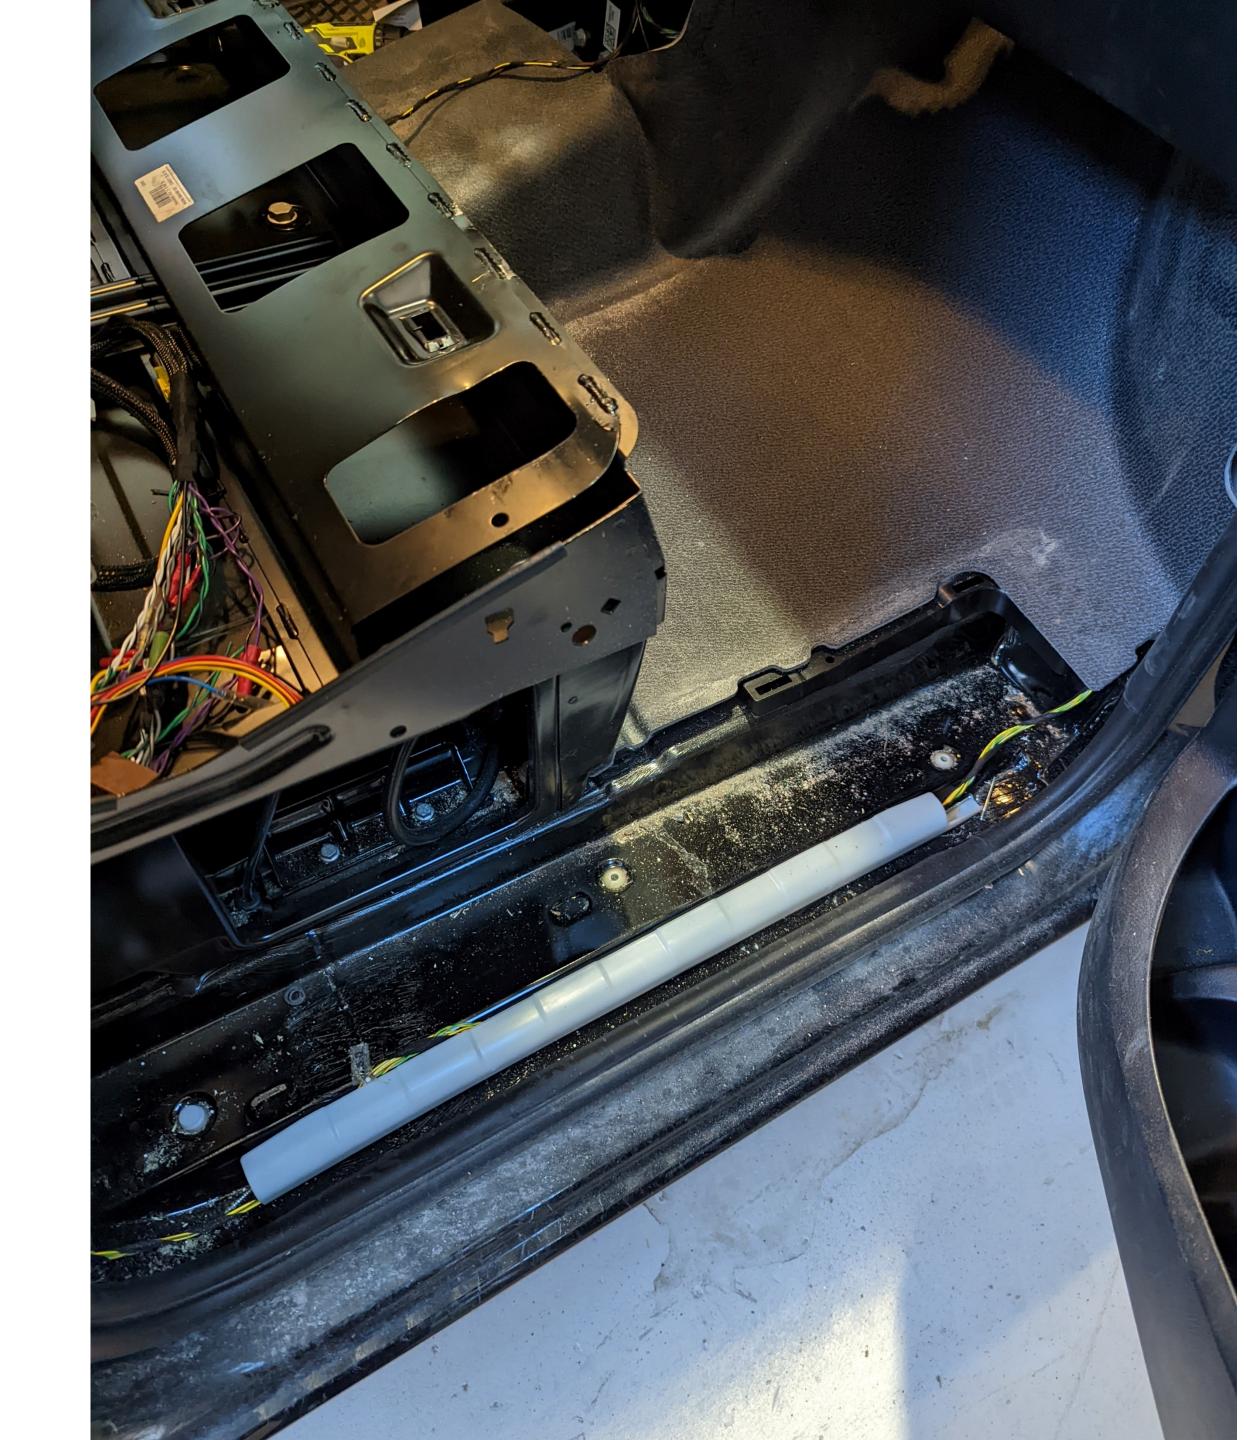

Pull up the cable at the back.



Amplifier 1

Install the amplifier at the back under the seat.



Amplifier 2

Screw the amplifier into place and connect the ZDAISOT connector cable.

Then put all the panels back in reverse order.



Installation Complete

The installation is now complete. Now connect the USB cable to a PC/MAC and download our file at (någon hemsida) to get the best result!

Happy listening.

